

High-performance, Manageable Dual WAN Security Firewall



100-user Office VPN Router

At the heart of your office network, NETGEAR's high performance security appliance, ProSafe® Dual WAN VPN Firewall offers a complete security solution for small and medium-sized companies. This rack-mountable, stateful packet inspection (SPI) firewall is equipped with support for up to 200 security associations (VPN tunnels). The FVX538 can serve as a DHCP server, supports Simple Network Management Protocol (SNMP), Quality of Service (QoS) and has a powerful SPI firewall to protect your PCs against intruders and most common Internet attacks.

Featuring eight auto-sensing 10/100 Mbps LAN ports, one Gigabit LAN port and two 10/100 WAN ports, the ProSafe® VPN Firewall FVX538 lets multiple computers in your office share two Internet connections. The dual WAN ports let you connect a second Internet line as a backup to insure that you're never disconnected. One LAN port can be dedicated as a hardware DMZ port for safely providing services to the Internet without compromising security on your LAN.

Richer Security


This powerful VPN Firewall extends security from the network core to the perimeter by preventing unauthorized network access using a SPI firewall, blocking denial-of-service (DoS) and other attacks, encrypting traffic traveling across the Internet.

Capacity to Spare

Dual WAN ports support two broadband connections. A second WAN port supports an additional broadband connection. This second WAN connection may be configured as a failover connection in case the primary connection fails or can be used to balance the workload by distributing traffic across the two connections for optimal per-user bandwidth.

Superior Value and Usability

Competitively priced and SNMP manageable, convenient VPN Wizard gathers basic information about your networks and recommends a VPN solution with supporting instructions. Bundled with NETGEAR's ProSafe VPN client software (VPN05L) — a five-user license is included. Virtual Private Network Consortium (VPNC) certified VPN supports secure data connectivity and transmission over the Internet and ensures interoperability with many other popular security products.

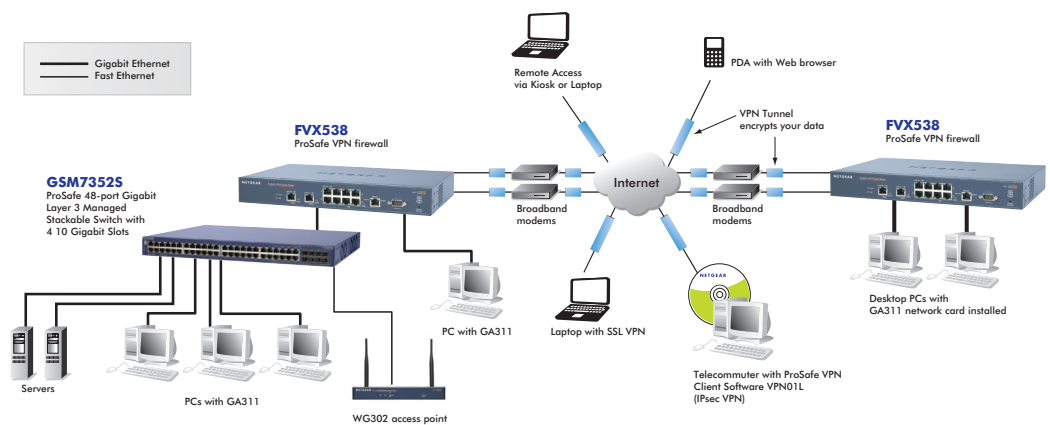

Technical Specifications

• System Requirements

- Cable, DSL or wireless broadband modem and Internet service
- Ethernet connectivity from broadband modem
- Network card for each connected PC
- Network software (e.g. Windows)
- Internet Explorer 5.0 or higher or Netscape Navigator 4.7 or higher
MAC, Linux

• Physical Interfaces

- LAN ports: Eight (8) 10/100 Mbps auto-sensing, Auto Uplink™ RJ-45 ports; one (1) Gigabit 10/100/1000 Mbps LAN port; one LAN port can be dedicated hardware DMZ port
- WAN ports: Two 10/100 Mbps Ethernet RJ-45 ports with auto fail-over and load balancing
- Serial port: One console port for command line interface (CLI) support

• Security Features

- SPI firewall: Stateful packet inspection (SPI) to prevent notorious denial-of-service (DoS) attacks, including logging, reporting and email alerts, address and protocol, Web URL keyword filtering, prevent replay attack (reassembly attack), port/service blocking. Advanced features include block Java/URL/ ActiveX based on extension, FTP/SMTP/RPC program filtering
- SIP Application Layer Gateway
- SIP compatibility list:
 - Linksys SPA-901
 - Linksys SPA-941
 - SNOM M3
 - Cisco 7940G
 - X-Lite 3.0 (software for phones)
 - D-Link DPH-140S
 - Grandstream GXP-2000
 - Polycom SoundStation 6000
 - Siemens C450
 - Aastra 51i
- VPN functionality: Two hundred (200) dedicated VPN tunnels, Manual key and Internet Key Exchange Security Association (IKE SA) assignment with pre-shared key and RSA/DSA signatures, key life and IKE lifetime time settings, perfect forward secrecy (Diffie-Hellman groups 1 and 2 and Oakley support), operating modes (main, aggressive), fully qualified domain name (FQDN) support for dynamic IP address VPN connections.

- IPsec support: IPsec-based 56-bit (DES), 168-bit (3DES), or 256-bit (AES) encryption algorithm, MD5 or SHA-1 hashing algorithm, AH/AH-ESP support, PKI features with X.509 v.3 certificate support, remote access VPN (client-to-site), site-to-site VPN, IPsec NAT traversal (VPN pass-through)
- Mode of Operation: One-to-one/many-to-one Multi-network Address Translation (NAT), classical routing, unrestricted users per port
- IP Address Assignment: Static IP address assignment, internal DHCP server on LAN, DHCP client on WAN, PPPoE client support

• Performance Features

- Throughput:
 - LAN-to-WAN: up to 80 Mbp
 - 3DES IPsec tunnel: Up to 30 Mbps

• Management Features

- Administration interface: SNMP (v1b, v2c) support, telnet, web graphic user interface, Secure Sockets Layer (SSL) remote management, user name and password protected; secure remote management support authenticated through IP address or IP address range and password; configuration changes/upgrades through Web GUI.
- Configuration and upgrades: Upload and download configuration settings, firmware upgradeable flash memory
- Logging: SYSLOG, email alerts
- Two-factor authentication support for administrator interface

• Functions

- VPN Wizard to simplify configuration of the VPN, auto detect to automatically detect ISP address type (static, dynamic, PPPoE), port range forwarding, port triggering, exposed host (DMZ), hardware DMZ, enable/disable WAN ping, DNS proxy, MAC address cloning/spoofing, Network Time Protocol NTP support, keyword content filtering, email alerts, DHCP server (info and display table), PPPoE login client support, WAN DHCP client, diagnostic tools (ping, trace route, other), port/service, Auto Uplink on switch ports and Quality of Service (QoS), SIP ALG

• Protocol Support

- Network: IP routing, TCP/IP, UDP, ICMP, PPPoE
- IP addressing: DHCP (client and server)
- Routing: RIP v1, RIPv2 (static routing, dynamic routing)
- VPN/security: IPsec (ESP, AH), MD5, SHA-1, DES, 3DES, IKE, PKI, AES

• Maintenance

- Save/restore configuration, restore defaults, upgrades via Web browser, display statistics, logging, SYSLOG support

• Hardware Specifications

- Processor: 533 MHz Intel XScale IXP425
- Memory: 32 MB flash, 64 MB DRAM
- Encryption accelerator: Cavium Processor up to 60+ Mbps (3DES+SHA-1) encryption
- Power requirements: 100-240V AC, 50-60 Hz, 15W Max
- Dimensions: 33 x 20.3 x 4.4 cm (13 x 8 x 1.75 in)
- Weight: 2.01 kg (4.42 lb)

• Environmental Specifications

- Operating temperature: 0° to 40° C (32° to 104° F)
- Operating humidity: 90% maximum relative humidity, non-condensing

Warranty

- Switch: NETGEAR Lifetime Warranty†
- Power supply: NETGEAR 3-year Warranty

Package Contents

- ProSafe Dual WAN VPN Firewall with 8-port 10/100 Switch (FVX538)
- Ethernet cable
- Rack mount kit
- Installation guide
- Resource CD with five user license of ProSafe VPN Client Software
- Warranty/support information card

NETGEAR Related Products**• Accessories**

- ProSafe VPN Client Software (VPN01L and VPN05L)
- ProSafe Network Management Software (NMS100)

• Wireless

- ProSafe 802.11g Access Point (WG102)
- ProSafe Dual Band Access Point (WAG102)
- WG302 ProSafe 802.11g Access Point

Ordering Information

- North America: FVX538NA
- Europe: FVX538EU
- Asia: FVX538AU

ProSupport Service Packs Available**• OnCall 24x7, Category 1**

- PMB0331-100 (US)
- PMB0331 (non-US)

• XPressHW, Category 1

- PRR0331

**NETGEAR®**

350 E. Plumeria Drive
San Jose, CA 95134-1911 USA
1-888-NETGEAR (638-4327)
E-mail: info@NETGEAR.com
www.NETGEAR.com

© 2009 NETGEAR, Inc. NETGEAR, the NETGEAR Logo, NETGEAR Digital Entertainer Logo, Connect with Innovation, FrontView, IntelliFi, PowerShift, ProSafe, ProSecure, RAIDar, RAIDiator, X-RAID, RangeMax, ReadyNAS and Smart Wizard are trademarks of NETGEAR, Inc. in the United States and/or other countries. Mac and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Information is subject to change without notice. All rights reserved.

†Lifetime warranty for product purchased after 05/01/2007. For product purchased before 05/01/2007, warranty is 3 years.

*Basic technical support provided for 90 days from date of purchase.